

DESCRIPTION:

The IS-SS-2RA is a stainless steel flush mount audio door station with standard and emergency call buttons. The unit is equipped with ADA compliant lettering and Braille signage for both the standard and emergency call buttons. A call status indicator is included to meet ADA rescue assistance requirements.


The emergency button will trigger two selectable relay outputs for activation of external systems or devices.

The unit is equipped with a CCTV camera input (Analog NTSC 1Vpp) for integration of a separate camera for viewing the area where the unit is located. The camera will come on when a call is placed from the unit, or when called by the master station. A directory strip for location identification is also provided. The unit is made of stainless steel and includes tamper resistant screws.

The IS-SS-2RA is compatible with the IS series communication system. Wiring is CAT-5e or CAT-6 to the designated exchange unit (IS-CCU, IS-SCU)

FEATURES:

- Audio communication between master station and calling area
- CCTV input for integration of video camera
- Two call buttons: Standard and Emergency
- ADA compliant lettering and Braille signage
- LED call status indicator
- Red mushroom button for emergency call
- Directory strip
- Stainless Steel faceplate with tamper resistant screws

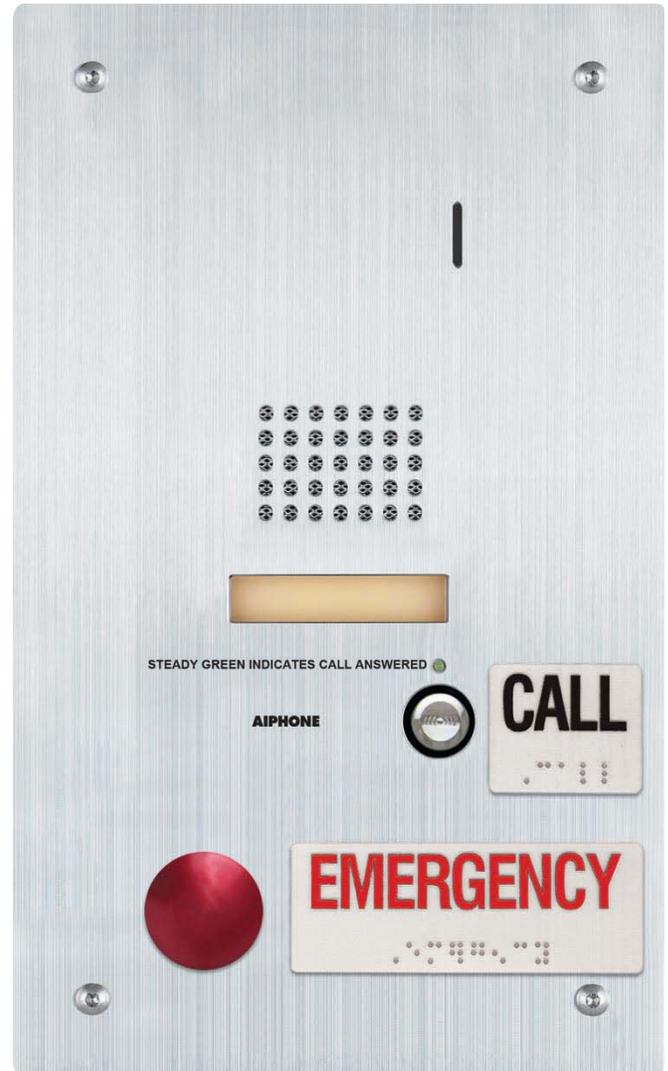

IS-SS-2RA

Stainless Steel Flush Mount Audio Door Station with Standard & Emergency Call Buttons

FEATURE CALL-OUT DEFINITIONS:

- [1] Microphone
- [2] Speaker
- [3] Directory card
- [4] Call status indicator
- [5] Call signage with Braille
- [6] Call button
- [7] Emergency button
- [8] Emergency signage with Braille

SPECIFICATIONS:

- Power Source: 48VDC (supplied from CEU)
- Communication: Open voice hands-free
- Wiring: CAT-5e or CAT-6
- Wiring distance: 980'
- Camera Input: Analog NTSC 1Vpp
- Door release: 24V AC/DC, 500mA (N/O, COM, N/C)
- Operating Temp: 14° - 140°F (-10° - 60°C)
- Dimensions: 7" W x 11-3/4" H x 1-7/8" D

FEATURE CALL-OUTS:

